



CJP30系列 series




应用领域：高端醫療器械(監護儀、分析儀、...) Application: High-end medical equipment, Health care equipment, Household appliance, Kitchen and bathroom, Cosmetology and bodycare etc.



產品參數表 Parameters								
型號 Model	額定電壓 Rated voltage	充氣時間 (100CC 0~300mmHg) Inflation time	負載電流 Current under load	負載流量 Flow under load	最大壓力 Max pressure	氣密性 Leakage	再啓動電壓 Restart voltage	噪音 Noise
CJP30-C03A1	DC 3 V	≤ 9 S	≤ 400 mA(300mmHg)	/	≥ 350 mmHg	< 3 mmHg/min	< 2.2 V	< 60 dB
CJP30-C03B7	DC 3 V	< 30 S	≤ 240 mA(300mmHg)	/	≥ 320 mmHg	< 3 mmHg/min	/	< 60 dB
CJP30-C04A1	DC 4.2 V	/	≤120 mA(127mmHg)	> 30 ml/min (127mmHg)	≥ 300 mmHg	< 3 mmHg/min	/	< 60 dB
其它參數 Others								
壽命實驗 Life test			30,000次 (100CC氣罐，充氣7秒停2秒排氣3秒為一循環)					
使用環境 Working environment			0~50°C, 75%RH					
可根據客戶具體要求進行定制。Customization based on specific customer requirements available.								

產品特性圖 Performance Curve

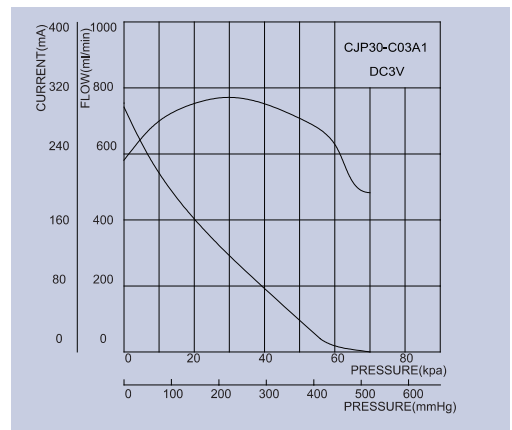

產品構造圖 Dimension Drawing

